

Use manual

1. Wiring (Note: do not separate the switch from the router by metal)

The red line is connected to the positive pole of DC 12V power supply;


Black wire is connected to the negative pole of DC power supply;

The blue line is the normally open contact of the relay, and it is connected with the white line when there is action;

The white line is the common end of the relay;

The green line is the normally closed contact of the relay, which is disconnected from the white line in case of operation;

(The blue line and the white line are equivalent to the two wiring of the ordinary point switch, and the green line is generally not connected)

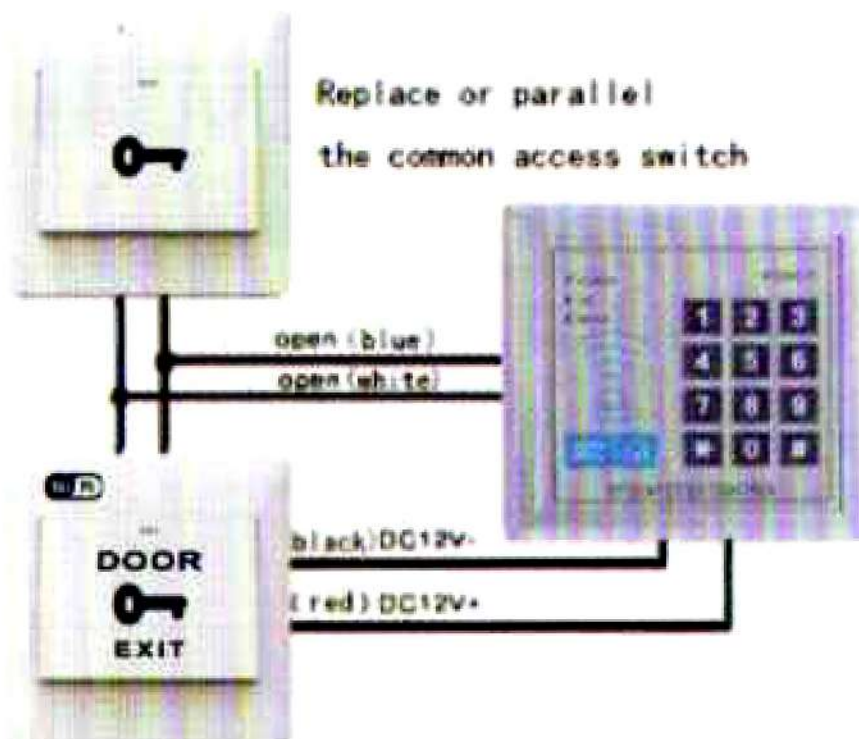

Note: The difference with ordinary access control switch is that the WIFI switch needs to be supplied with power supply

2. Pairing button

1. Double-click the button quickly and continuously, the red indicator light flashes quickly. The switch enters the pairing state at this time.
2. Press any button on the 433 remote control, the red indicator light stops flashing, and the button pressed on the remote control is paired successfully.

Unbind:

1. Press the button eight times in rapid succession, the red indicator light flashes slowly, and the switch enters the unbinding state.
2. Press the paired button, the indicator light stops flashing, and the pressed button is successfully unbound.

3. Distribution network settings

Pairing button is the panel switch itself. Press the switch, click and output it once, hold the switch and do not release it. The switch can enter the pairing state in about 5 seconds (the blue indicator flashes twice to stop for a while), release it after entering the pairing state, and then operate it on the mobile APP.

Pairing can only be carried out in the pairing state. If the pairing has not been completed, press the pairing button again to enter the pairing state.

APP installation



"TuyaSmart" APP



"Smart Life"APP

Installation method 1: search "TuyaSmart" or "Smart Life" in each major application market, download and install. (recommended)

Installation method 2: scan the QR code above, and then download and install according to the prompts. Once the registration is complete, you can start pairing the switch to your phone.

If the matching cannot be completed, you can check one by one according to the following points:

1. First, check whether the device is in the pairing state (the indicator flashes twice and stops for a while), it must be in this state to be paired; If the device has left the pairing state, the device should be repaired.
2. If the quick mode is still unable to complete the pairing, you can try to use the "Compatibility Mode" (the bottom item of the APP pairing interface) for pairing. The hot spot password is 12345678;
3. If the router you are connected to is a dual-band router, you can try to pair it with compatibility mode.
4. The router name is not supported to contain Chinese characters, and the router password is not supported to contain special symbols (only English and numbers are recognized);
5. If the APP does not automatically display the name of the router to which the phone is connected, the router may hide the SSID, and the router should be set to the public state;

6. It is easy to make mistakes in the router password. Please re-enter the password every time you enter it, and make sure the password is correct.

7. When installing the APP, if a certain permission is restricted, the pairing will fail;

8. If the pairing cannot be completed, it is necessary to check whether the device signal is normal: hold down the pairing button for about 7 seconds to enter the pairing state, and then press it again for about 7 seconds to enter the flashing state of the indicator light.

At this time, search the hot spot at the beginning of ITEA in the mobile phone hot spot (that is, the interface for searching WiFi normally). If there is this hot spot, it means that the switch signal is normal. You can try to replace the WiFi signal or re-pair peripheral devices such as mobile phone. If you can't find a hot spot after repeated tests, it means there is a problem with the hardware.

9. If you cannot solve the matching problem or encounter problems during use, you can click on the icon  of the service desk at the lower right of the APP home page to troubleshoot or give feedback on the problem in the corresponding link.